


## SINGLE LEAF GATE

Experience of over 40 years...



Custom-Designed

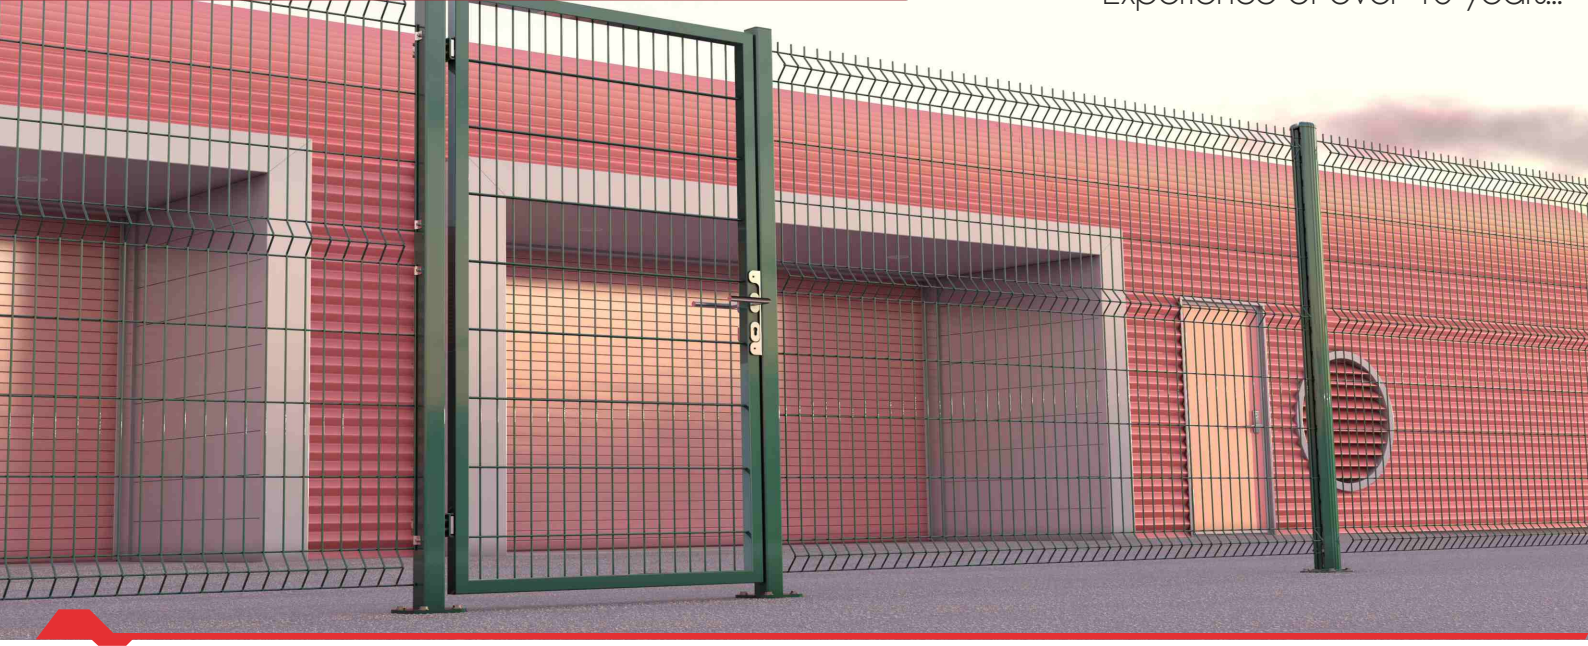

Flexible Production



Durability



Easy Installation

Commonly used at residential & commercial buildings and gardens. Available in any colour, infill and dimension. Long lifetime with NANO coating.


### ADVANTAGES

- Easy & Fast installation.
- Tailor made .
- High corrosion resistance due to NANO coating.
- Flexible gate opening direction due to special hinges.

### TECHNICAL FEATURES


- **Gate frame:** As a standard practise 40x40mm square profile is used for gate frames. Up to the gate dimension frame section vary..
- **Gate Infill :** Optional
- **Gate Post :** Standard 60x60mm Square Post with plastic cap. Gate post may vary at different dimensions.
- **Gate fittings:** Embedded Lock into frame, adjustable hinges, galvanised / stainless steel gate handles, barels
- **Opening direction:** Available in all directions..
- **Colour:** Standard colours Ral 6005 / green and Ral 7016 Anthrasit. At any request available in any RAL colours.

All technical features and material details may vary on project basis. Available in different panel sizes, mesh sizes and wire thickness. 5% tolerance on overall dimensions.




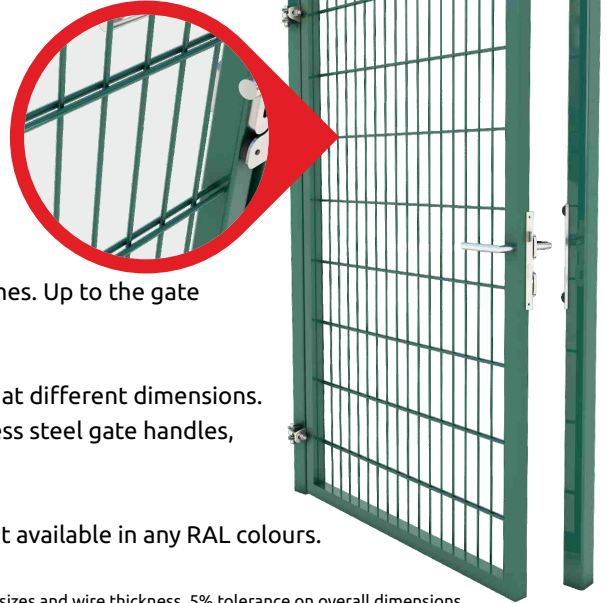


### NANO COATING





NANO coating is a special technology that increases the adhesion performance of the coating to the metal surface and creates pores in NANO sizes. Thanks to these pores, the powder coating adheres with high performance on metal surface.

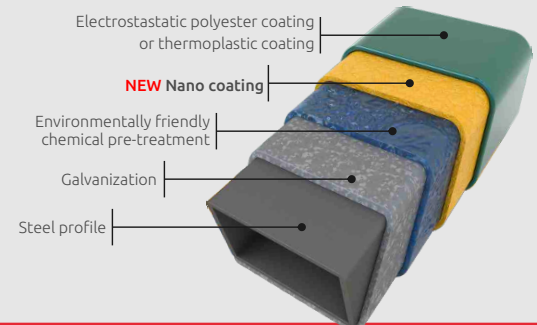

HEIGHT	NOMINAL WIDTH	CLEAR OPENING	GATE POST HEIGHT		GATE POST	GATE FRAME	GATE FRAME	GATE INFILL
			CONCRETE	SOIL				
1.00	1.00	0.94	1.00	1.50	60x60x2mm	0.95	40x40x2mm	Mesh size; 50x200 mm
	1.20	1.14			80x80x2mm			
	1.50	1.42			80x80x2mm			
1.50	1.00	0.94	1.50	2.00	60x60x2mm	1.45	40x40x2mm	Wire thickness; 6/5/6 mm
	1.20	1.14			80x80x2mm			
	1.50	1.42			80x80x2mm			
2.00	1.00	0.94	2.00	2.50	60x60x2mm	1.95	40x40x2mm	Wire thickness; 6/5/6 mm
	1.20	1.14			80x80x2mm			
	1.50	1.42			80x80x2mm			

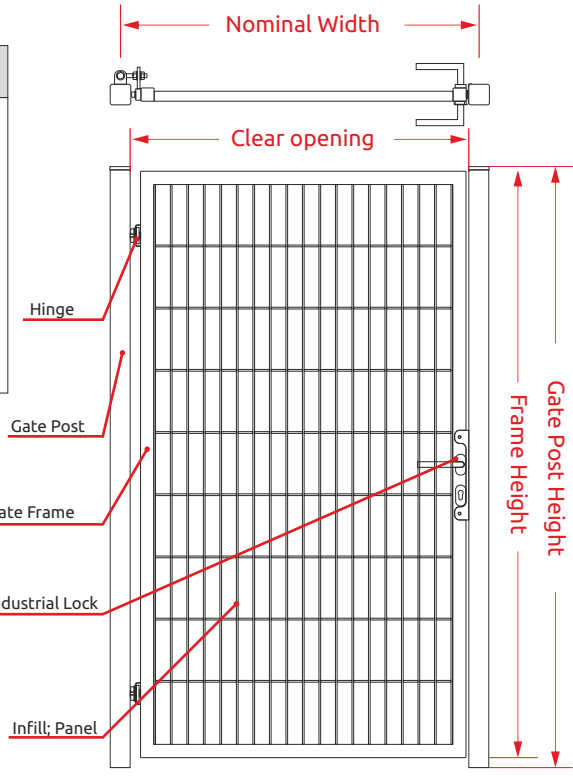


## GATE INFILL OPTIONS



\* As a standard practise Double Panel is used at Gate infills. However any of above options or other could be chosen and personalize the gate

## Gate opening direction

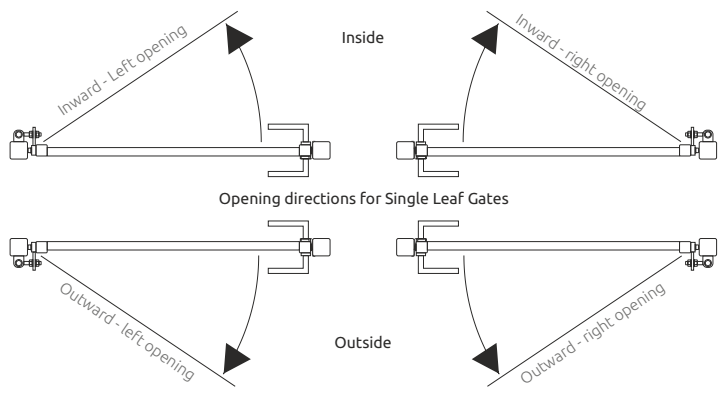

\* Right - left direction change only available at gate infill with flat panel



## APPLICATION AREAS

